



MID-SIZE, FULL-MATRIX PORTABLE CHANGEABLE MESSAGE SIGN

The medium-sized PCMS-320 is the ideal changeable message sign for urban areas where space is limited. Sturdy and durable, this trailer-mounted model requires little maintenance. Its intuitive remote management will maximize the safety of your workers while saving them time. Solar-powered and easy to set up, the PCMS-320 will give you an excellent return on your investment for years to come.

3 WAYS TO CHANGE A MESSAGE :

- AT THE SIGN, V-TOUCH CONTROLLER
- NEAR THE SIGN OR REMOTELY, JAMLOGIC® WEB ON YOUR TABLET OR SMARTPHONE
- REMOTELY, JAMLOGIC® COMPUTER SOFTWARE ON YOUR COMPUTER OR LAPTOP

PRO SERIES FEATURES

STEALTH TECHNOLOGY

Maintenance-free batteries
Anti-theft hidden battery compartment

V-TOUCH CONTROLLER

Integrated 4G modem
10 year cell plan

HIGH-PERFORMANCE LEDS

Brighter with greater angularity
Greater power efficiency for longer autonomy

JAMLOGIC SOFTWARE

Hourly automated status and battery/GPS alerts & reports
Interactive map & list view of all equipment
Project folders to organize equipment
Logs date/time of all remotely activated messages

CONNECTED DEVICE

Compatible with the Connected Work Zone (CWZ)* data-sharing feeds

*Previously the Work Zone Data Exchange (WZDx)



APPLICATIONS

- Highway construction
- Advertising / Special events
- Road construction
- Department of transportation
- City and county
- Law enforcement
- Connected work zones
- Smart work zones

OTHERS FEATURES

DURABLE, EASY TO USE

4 LEVELING JACKS

Stabilization and easy transportation

TONGUE WHEEL JACK

Easy and safe trailer setup

ELECTRO-HYDRAULIC LIFT MECHANISM

Quick and effortless deployment

RUGGED INDEXED ROD MAST BRAKE

270° rotation (15° increments)

LOCKABLE CONTROL BOX

To protect the controller, modem, pump, and other components

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE

For easy towing

V-TOUCH CONTROLLER

EASY-TO-READ


7-inch (178 mm) color LCD touchscreen display

TIME-SAVING

Create your own library of messages

SIMPLE TO OPERATE

Intuitive point-and-go icons make displaying and editing messages quick and easy

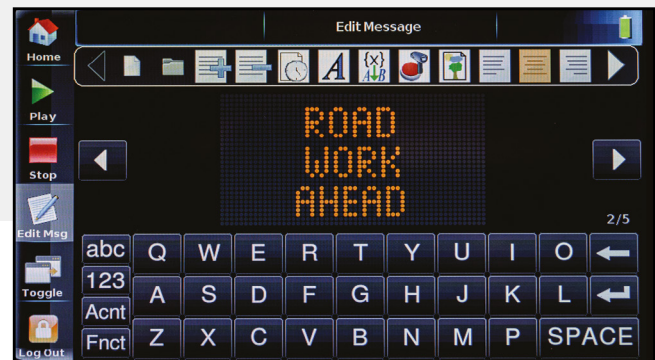

SPECIFICATIONS

DISPLAY

- Display panel:
64 x 105 in. (1625 x 2667 mm)
- Full-matrix of 30 x 48 pixels
- 4 LEDs per pixel
- 3 lines of 8 characters per line
(default 5 x 7 font)
- Default font of 13^{3/4} in. (350 mm)
(5 x 7 pixels)
- Up to 3 lines & 11 characters per
line (3 x 7 font)
- Plug-and-play display modules for
simplified maintenance

DIMENSIONS & WEIGHTS

- Overall length: 153^{1/2} in. (3899 mm)
- Overall width: 82 in. (2085 mm)
- Traveling height: 107 in. (2720 mm)
- Operating height: 154 in. (3905 mm)
- Axle/suspension: 3,500 lbs (1588 kg)
- Weight (approx.): 2,070 lbs (939 kg)

OPTIONS

- Battery charger
- Radar
- Data logger (requires radar)
- Fixed camera
- PTZ camera
- Tilt-and-rotate solar panels

Other options are available to meet your needs.

WARRANTY

- 1 year on complete trailer
- 2 years on electronic components
manufactured by Ver-Mac

