VER-MAC®

PCMS-1500C

EXTENDED, FULL-MATRIX PORTABLE CHANGEABLE MESSAGE SIGN

Capable of displaying lines of texts, graphics and illuminated symbols, our largest trailer-mounted changeable message sign increases the reach of your messages. Ideal for highway work zones, the PCMS-1500C is sturdy and durable, and is managed remotely to maximize the safety and productivity of your workers. Solar-powered and easy to set up, the PCMS-1500C will give you an excellent return on your investment for years to come.

3 WAYS TO CHANGE A MESSAGE :

- AT THE SIGN, V-TOUCH CONTROLLER
- NEAR THE SIGN OR REMOTELY, JAMLOGIC® WEB ON YOUR TABLET OR SMARTPHONE
- REMOTELY, JAMLOGIC® COMPUTER SOFTWARE ON YOUR COMPUTER OR LAPTOP

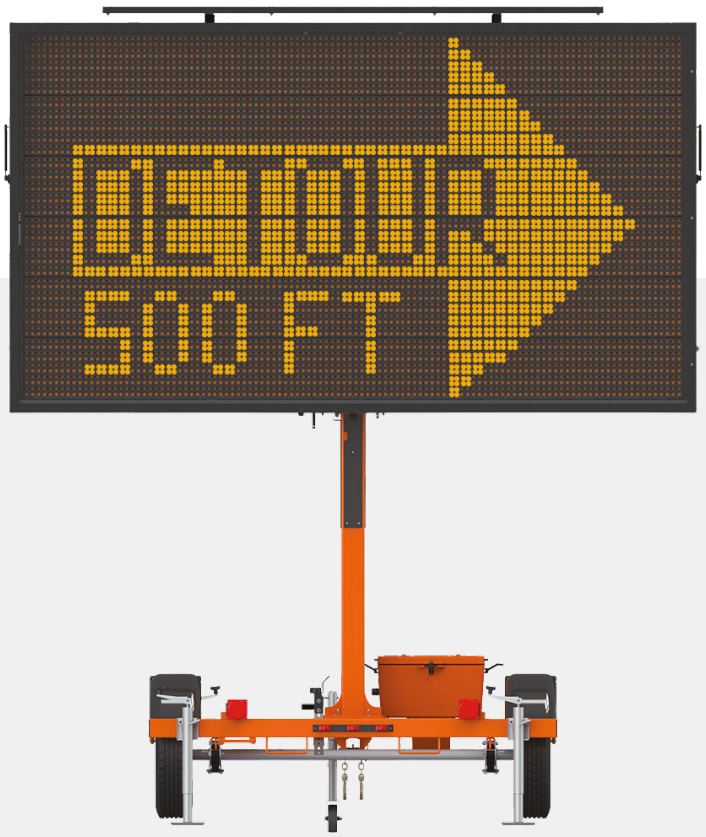

PRO SERIES FEATURES

STEALTH TECHNOLOGY
Maintenance-free batteries
Anti-theft hidden battery compartment

V-TOUCH CONTROLLER
Integrated 4G modem
10 year cell plan

HIGH-PERFORMANCE LEDS
Brighter with greater angularity
Greater power efficiency for longer autonomy

JAMLOGIC SOFTWARE
Hourly automated status and battery/GPS alerts & reports
Interactive map & list view of all equipment
Project folders to organize equipment
Logs date/time of all remotely activated messages

CONNECTED DEVICE
Compatible with the Connected Work Zone (CWZ)* data-sharing feeds

**Previously the Work Zone Data Exchange (WZDx)*

APPLICATIONS

- Highway construction
- Smart work zones
- Advertising / Special events
- Connected work zones

OTHERS FEATURES

DURABLE, EASY TO USE

4 LEVELING JACKS
Stabilization and easy transportation

TONGUE WHEEL JACK
Easy and safe trailer setup

ELECTRO-HYDRAULIC LIFT MECHANISM
Quick and effortless deployment

RUGGED ROD MAST BRAKE
360° rotation (6° increments and infinite positions using manual hand brake)

LOCKABLE CONTROL BOX
To protect the controller, modem, pump, and other components

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE
For easy towing

V-TOUCH CONTROLLER

EASY-TO-READ
7-inch (178 mm) color LCD touchscreen display

TIME-SAVING
Create your own library of messages

SIMPLE TO OPERATE
Intuitive point-and-go icons make displaying and editing messages quick and easy

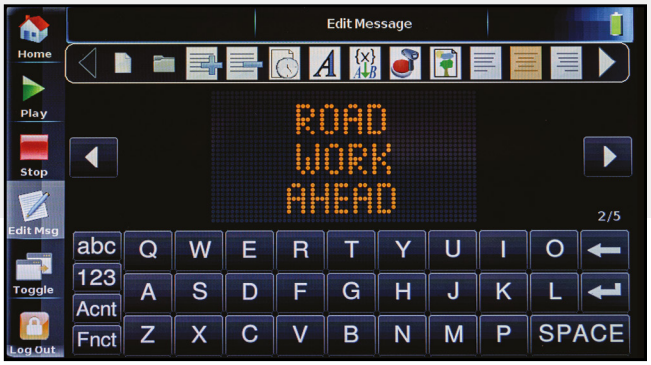

SPECIFICATIONS

DISPLAY

- Display panel: 83 x 145 in. (2100 x 3683 mm)
- Full matrix of 30 x 56 pixels
- 4 LEDs per pixel
- Up to 3 lines and 9 characters per line (default 5 x 7 font)
- Up to 12 characters per line (3 x 7 font)
- Display sign rotates 360 degrees for perfect setting
- Plug-and-play display modules for simplified maintenance

DIMENSIONS & WEIGHTS

- Overall length: 182 in. (4624 mm)
- Overall width: 86 1/2 in. (2197 mm)
- Operating height: 172 in. (4363 mm)
- Traveling height: 113 in. (2874 mm)
- Weight (approx.): 1860 lbs (844 kg)
- Axle/suspension: 3500 lbs (1587 kg)

OPTIONS

- Battery charger
- Radar
- Statistics (requires radar)
- Fixed camera
- PTZ camera
- Tilt-and-Rotate solar panels

Other options are available to meet your needs.

WARRANTY

- 1 year on complete trailer
- 2 years on electronic components manufactured by Ver-Mac

CERTIFIED SYSTEM BNQ ISO 9001:2015

12/06 © 2025, Signalisation Ver-Mac inc. All rights reserved.

QUEBEC, CANADA OFFICE: 1781 BRESSE STREET, QUEBEC CITY, QC, G2G 2V2, CANADA
CONROE, TX OFFICE: 3479 POLLOK DR, CONROE, TEXAS, 77303, US
T. **418-654-1303** TF. **888-488-7446** F. **418-654-0517**